



# 50-2 / 50-3

## 50T Air Hydraulic Jacks

### DESCRIPTION

#### 50-2 H Air hydraulic jack

Single stage jack for agricultural and contractors' machinery, trailers and other high clearance applications

- Minimum height of 220 mm
- Designed for heavy-duty, intensive commercial use
- Hard chromium plated piston rod for long life
- Built-in safety overload valve
- Hand-operated dead-man's control for optimum safety whilst lifting and lowering
- Also available: 50-2TH model with telescopic handle, increasing the reach under the vehicle to 2,170 mm ensuring safe and easy operation
- With 2 extensions (50/100 mm)

#### 50-3 Air Hydraulic Jack

3-stage air hydraulic jack for low buses and other low clearance vehicles

- Minimum height of only 150 mm combined with a high lifting capacity
- Telescopic cylinders ensure an excellent maximum lift together with a low closed height
- Designed for heavy duty, intensive commercial use
- Built-in safety overload valve
- Hand operated dead-man's control for optimum safety whilst lifting and lowering
- 50-3TH model with telescopic handle increasing the reach under the vehicle to 2,165 mm ensuring safe and easy operation
- With 2 extensions (50/100 mm)



Specifications/images subject to change without prior notice. Images are for illustration purposes only. To validate warranty, proof of a valid maintenance contract will be required. Product of Denmark 




# 50-2 / 50-3 50T Air Hydraulic Jacks

## DESCRIPTION

### 50-3 H Air hydraulic jack

3-stage air hydraulic jack for high clearance vehicles

- Minimum height of 220 mm and high maximum height of 560 mm
- Designed for heavy duty, intensive commercial use
- Hard chromium plated piston rod for long life
- Built-in safety overload valve
- Hand-operated dead-man's control for optimum safety by lifting and lowering
- 50-3HTH model with telescopic handle increasing the reach under the vehicle to 2165 mm ensuring safe and easy operation.

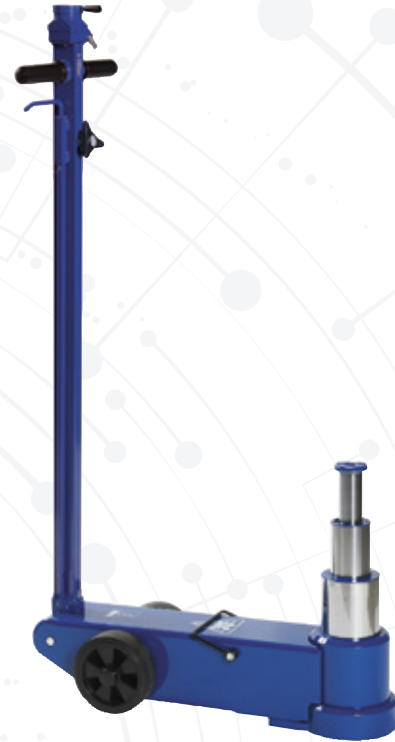

Tech Specs	50-2	50-3	50-3H
Capacity	50 /25 t	50 /25 /10 t	50 / 25 / 10 t
Min. Height	220 mm	150 mm	220 mm
Max. Height	340 / 450 mm	210 / 265 / 355 mm	340 /450 / 560 mm
Frame Length	810 mm	810 mm	810 mm
Handle Length	1,355 mm	1,355 mm	1,355 mm
Width with wheels	315 mm	310 mm	310 mm
Width	200 mm	200 mm	200 mm
Air supply	9 – 12 bar	9 – 12 bar	9 – 12 bar
Air Consumption	350 l/min	350 l/min	350 l/min
Weight	80 kg	67 kg	73 kg

— ★★★★★ —  
**PRODUCT OF DENMARK**   
— ★★★★★ —



Specifications/Images subject to change without prior notice. Images are for illustration purposes only. To validate warranty, proof of a valid maintenance contract will be required. Product of Denmark 