

**DESCRIPTION****Posts:**

- Integrated eccentric brake system
- Emergency stop valve
- Obstruction system
- Pneumatic parking system in height adjustable ratchets
- Pump unit with immersed motor and control unit on rear left post
- Pushbutton control unit with alarm signal
- Hydraulic cylinder under left platform
- Lifting and lowering by means of cables
- Emergency lowering valve

**Platforms:**

- One moveable platforms as standard
- Platforms prepared for AUTOPSTENHOJ scissor jack

**Standard colours:**

- Platforms & posts: RAL 7016 – grey
- Ramps: RAL 3020 – red

**Versions**

- Available with different voltages
- Drive-on ramps and stops for surface-mounting, alternatively drive-over ramps for recessed installation
- S = flush platforms
- WL = with front recesses for turn tables and rear side slip plates, center cover plate between recesses and side slip plates
- G = galvanized platforms
- 42 = 4,200 mm platforms
- 47 = 4,700 mm platforms
- 51 = 5,100 mm platforms

**Optional extras:**

- Set of expansion bolts
- Extra control unit
- LED-lighting set
- Set of two cover plates for recesses
- Set of two 385 mm ramp extensions
- Set of two platform extensions (0.5 m)




Tech Specs	KAR45
Lifting Capacity	4T
Lifting height	1,670 mm
Working height	1,810 mm
Lifting/lowering time	Standard: 24/26 sec. D: 16/26 sec.
Pump Unit	Standard: 3 kW D: 2x3 kW
Total length	5,560 / 5,980 mm
Usable length of platform	4,680 / 5,100 mm
Wheel base, min - max	variable
Platform width	550 mm
Distance between platforms	805-1,285 mm
Min. height	140 / 160 mm
Width between posts	3,000 mm
Total width	3,422 mm
Total height	2,233 mm

**PRODUCT OF ITALY**

Specifications/Images subject to change without prior notice. Images are for illustration purposes only. To validate warranty, proof of a valid maintenance contract will be required. Product of Italy

### DESCRIPTION

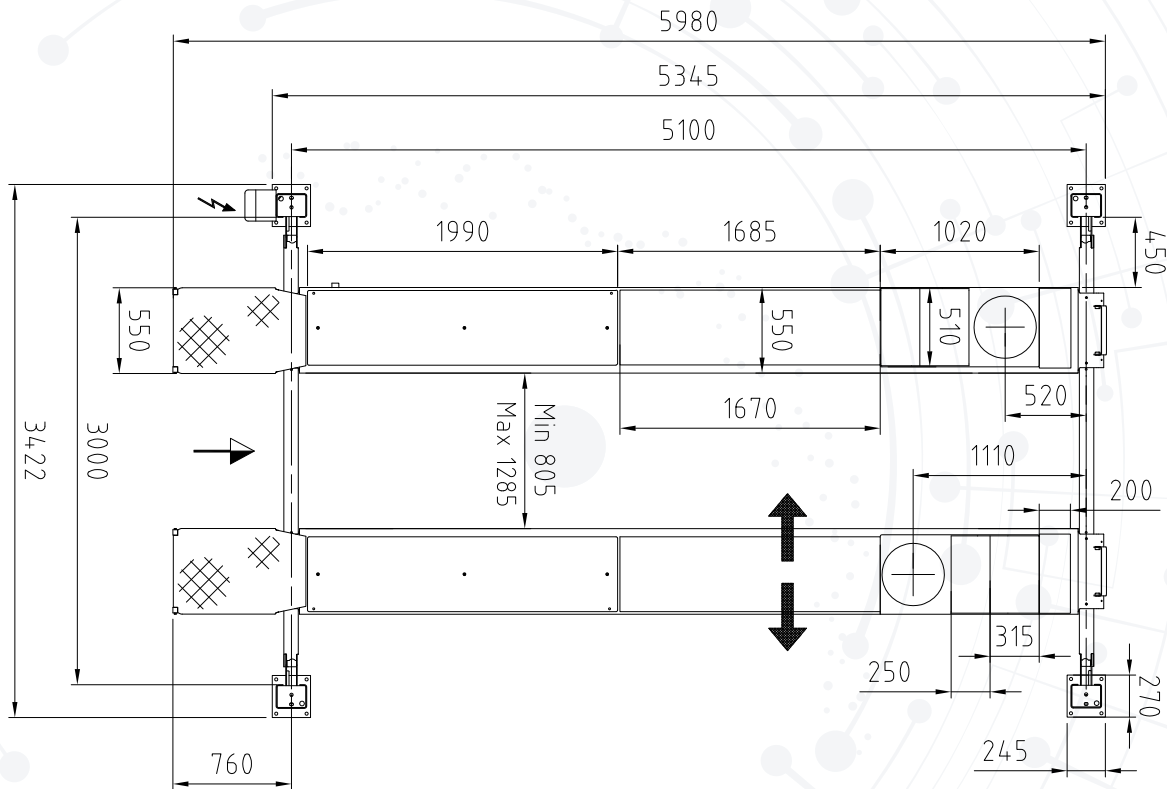

Specifications/Images subject to change without prior notice. Images are for illustration purposes only. To validate warranty, proof of a valid maintenance contract will be required. Product of Italy