

### DESCRIPTION

#### Automatic Tyre Changer


The F560 is an Electro-hydraulic universal tyre changer for trucks, tractors and earth-moving vehicles with wheels from 14 to 56 (with set of 4 extensions).

#### Features:

- Suspended control console
- Two rotation speed
- Automatic tools arm translation
- Non return check valve fitted onto cylinder; locking wheel in the event of electrical failure or hose rupture
- Radio control (optional)

#### Supplied complete with:

- 1 x Bead lifting lever
- 1 x Rim ring lever
- 1 x Rim clamp
- 1 x Extensions kit 56" (4 pcs)
- 1 x Operators manual

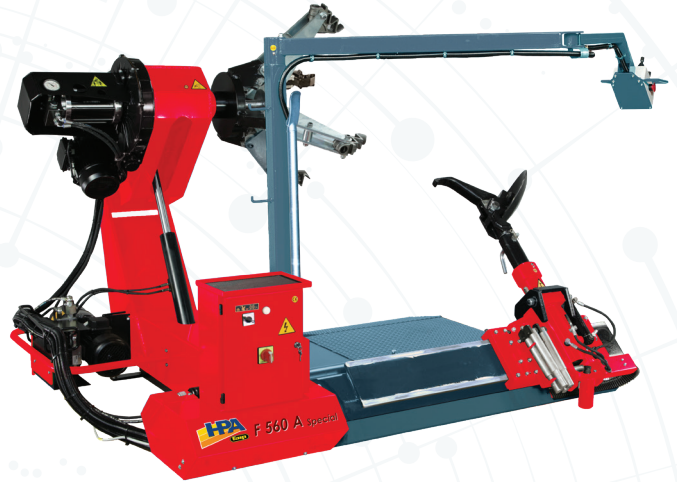

Tech Specs	F560 SPECIAL Y
Rim Sizes	14"-56" (With KP56 extensions)
Power	415 V
Maximum Wheel Diameter	2500 mm
Maximum Wheel Width	1220 mm
Maximum Wheel Weight	1700 Kg
Wheel Lifting Cylinder Capacity	2200 Kg
Working Pressure	170 BAR
Gear Box Motor (Two Speed)	1.25 / 1.8 kW
Pump Motor (Two speed)	1.3 kW / 1.8 kW
Pump Motor (Single speed)	1.5 kW
Noise Level When Running	< 70 dB(A)
Machine Weight (With accessories)	1200 Kg

\*\*\*\*\*  
**PRODUCT OF ITALY** 



Specifications/Images subject to change without prior notice. Images are for illustration purposes only. To validate warranty, proof of a valid maintenance contract will be required. Product of Italy 