


JSL 35 3.5T Double Scissor Lift

DESCRIPTION

Product Highlights:

- Strong structure of 4 cylinders to ensure two independent oil circuits: hydraulic safety
- Low profile platforms are suitable for special or tuned vehicles
- Suitable for surface or in-ground installation
- The automatic bleeding of hydraulic circuits can be done easily by the operator without any type of technical assistance
- Equipped with safety valve against over-pressure
- Hydraulic system with safety device against unexpected uneven of platforms
- Automatic safety stop at 300 mm from the floor and throughout the whole descent the lift will beep warning
- High quality sliders guarantee a soft and stable lifting and lowering movement
- Free maintenance self-lubricating bushings
- Pushbuttons at 24V, type "dead man"
- Separated UP & DOWN pushbuttons and general switch lockable with padlock
- Insolated ON/OFF switch
- Safety system against obstacles on the lowering
- Made in Spain

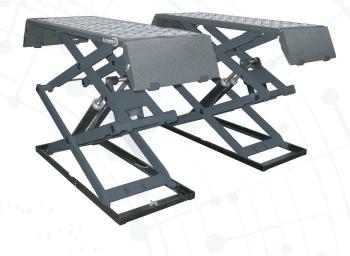

Tech Specs	JSL 35
Load Capacity	3500 Kg
Platforms Length	1534 - 2067 mm
Platforms Width	630 mm
Drive On Height	105mm
Maximum Lifting Height	1930 mm
Distance Between Platforms	s 720 mm
Overall Width	2000 mm
Motor	415 V / 3 Phase
Warranty	3 years parts & labour











Specifications/images subject to change without prior notice. Images are for illustration purposes only. To validate warranty, proof of a valid maintenance contract will be required. Product of Spain 🧃

